




CBB21 Metallized Polypropylene Film DC Epoxy Capacitor

CBB21 Metallized Polypropylene Film DC Epoxy Capacitor

技術參數 Technical Specification :

型號 Type	CBB21
執行標準 Standard	IEC60384-16 GB10191
容量範圍 Capacitance range	0.01 μ F ~4.7 μ F
容量偏差 Capacitance tolerance	J(\pm 5%),K(\pm 10%)
額定定額 Rated voltage	250Vdc/400Vdc/630Vdc
耐電壓 Withstand voltage	1.4UR(DC)/5S
損耗角正切 Dissipation factor	$\text{tg } \delta \leq 0.002(1\text{KHz})$
絕緣電阻 Insulation resistance	$C \leq 0.3 \mu \text{ F} \geq 25000 \text{ M } \Omega$ $C > 0.3 \mu \text{ F} \geq 7500 \text{ S}$ $R \cdot C \geq 7500 \text{ S}$
使用溫度 Operating temperature	-40~+85 $^{\circ}$ C

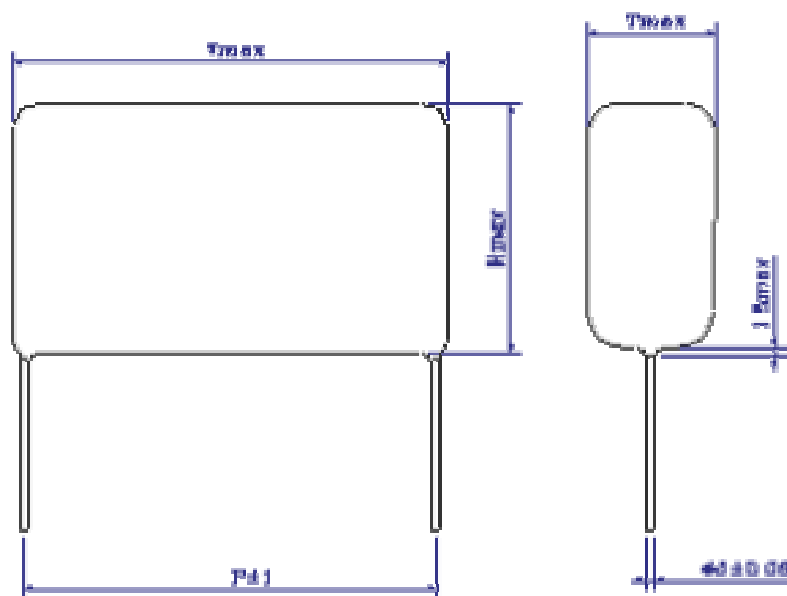

Da Hua (Hong Kong) Development Co.
Address: G/F 397 Shanghai Street, Mongkok, Hong Kong
Tel:852 26269193 Fax:852 26269229
Email:sales@dahuahk.com Website:www.dahuahk.com

外形尺寸 Outline Size :

標準容 量 μF	250VDC				400VDC				630VDC			
	外形尺寸(mm) Dimension				外形尺寸(mm) Dimension				外形尺寸(mm) Dimension			
	Wmax	Tmax	Hmax	P	Wmax	Tmax	Hmax	P	Wmax	Tmax	Hmax	P
0.01									13.0	5.8	9.7	10
0.012									13.0	6.1	10.0	10
0.015									13.0	6.5	10.5	10
0.018									13.0	6.5	10.4	10
0.022									13.0	6.7	11.4	10
0.027									13.0	7.2	11.9	10
0.033	13.0	5.6	9.6	10	13.0	5.6	9.6	10	13.0	7.8	12.5	10
0.039	13.0	2.9	9.9	10	13.0	5.9	9.9	10	13.0	6.4	10.3	10
0.047	13.0	6.3	10.3	10	13.0	6.3	10.3	10	13.0	6.7	10.7	10
0.056	13.0	6.5	11.2	10	13.0	6.5	11.2	10	13.0	6.4	12.7	10
0.068	13.0	7.0	11.7	10	13.0	7.0	11.7	10	13.0	6.9	13.2	10
0.082	13.0	7.5	12.2	10	13.0	7.5	12.2	10	13.0	7.5	13.8	10
0.1	13.0	8.2	12.9	10	13.0	8.2	12.9	10	13.0	8.2	14.4	10
0.12	13.0	8.8	13.5	10	13.0	8.8	13.5	10				
0.15									23.0	7.1	11.8	20
0.18									23.0	7.1	13.4	20
0.22									23.0	7.7	14.0	20
0.27									23.0	8.4	14.7	20
0.33	23.0	6.9	11.6	20	23.0	6.9	11.6	20	23.0	9.2	15.5	20
0.39	23.0	7.4	12.1	20	23.0	7.4	12.1	20	23.0	9.9	16.2	20
0.47	23.0	8.0	12.7	20	23.0	8.0	12.7	20	23.0	10.2	18.0	20
0.56	23.0	8.0	14.3	20	23.0	8.0	14.3	20	23.0	11.1	18.9	20
0.68	23.0	8.7	15	20	23.0	8.7	15	20	23.0	12.2	20	20
0.82	23.0	9.5	15.8	20	23.0	9.5	15.8	20	23.0	13.4	21.2	20
1	23.0	10.4	16.7	20	23.0	10.4	16.7	20	23.0	14.8	22.6	20
1.2	23.0	10.7	18.5	20	23.0	10.7	18.5	20	34.0	11.9	19.8	31
1.5	23.0	11.9	19.8	20	23.0	11.9	19.8	20	34.0	13.3	21.2	31
1.8	23.0	13.1	20.9	20	23.0	13.1	20.9	20	34.0	13.9	23.4	31
2.2									34.0	15.5	24.9	31
2.7									34.0	17.2	26.6	31
3.3									34.0	19.1	28.6	31
0.033									18.0	5.8	9.7	15
0.039									18.0	6.1	10	15
0.047									18.0	6.5	10.4	15
0.056									18.0	6.9	10.8	15
0.068									18.0	6.6	10.5	15
0.082									18.0	6.8	11.5	15
0.1	18.0	6.4	10.3	15	18.0	6.4	10.3	15	18.0	7.3	12	15
0.12	18.0	5.8	9.7	15	18.0	5.8	9.7	15	18.0	7.9	12.6	15
0.15	18.0	6.2	10.2	15	18.0	6.2	10.2	15	18.0	8	14.3	15
0.18	18.0	6.4	11.1	15	18.0	6.4	11.1	15	18.0	8.7	15	15
0.22	18.0	6.9	11.6	15	18.0	6.9	11.6	15	18.0	9.5	15.8	15
0.27	18.0	7.5	12.2	15	18.0	7.5	12.2	15				
0.33	18.0	7.6	13.8	15	18.0	7.6	13.8	15	29.0	7.8	14.1	26
0.39	18.0	8.1	14.4	15	18.0	8.1	14.4	15	29.0	8.3	14.6	26
0.47	18.0	8.3	16.1	15	18.0	8.3	16.1	15	29.0	8.5	16.4	26
0.56	18.0	9.0	16.9	15	18.0	9.0	16.9	15	29.0	9.2	17.1	26
0.68	29.0	7.7	13.9	26	29.0	7.7	13.9	26	29.0	10.1	18	26
0.82	29.0	7.8	15.7	26	29.0	7.8	15.7	26	29.0	11.1	18.9	26
1	29.0	8.5	16.4	26	29.0	8.5	16.4	26	29.0	12.2	20.1	26
1.2	29.0	9.3	17.2	26	29.0	9.3	17.2	26	29.0	12.7	22.2	26
1.5	29.0	10.4	18.2	26	29.0	10.4	18.2	26	29.0	14.3	23.7	26
1.8	29.0	10.7	20.2	26	29.0	10.7	20.2	26	29.0	15.7	25.2	26
2.2	29.0	11.9	21.3	26	29.0	11.9	21.3	26	29.0	17.5	26.9	26
2.7	29.0	13.2	22.7	26	29.0	13.2	22.7	26				
3.3	29.0	14.7	24.1	26	29.0	14.7	24.1	26				
3.9	29.0	16.0	25.5	26	29.0	16.0	25.5	26				
4.7	29.0	17.7	27.1	26	29.0	17.1	27.1	26				

Da Hua (Hong Kong) Development Co.
 Address: G/F 397 Shanghai Street, Mongkok, Hong Kong
 Tel:852 26269193 Fax:852 26269229
 Email:sales@dahuahk.com Website:www.dahuahk.com