



CBB60 AC Metallized Film Capacitor

CBB60 AC Metallized Film Capacitor

技術參數 Technical Specification :

型號 Type	環境溫度 Ambient Temperature (°C)	額定電壓 Rated voltage (VAC)	容量範圍 Rated capacitance (μ F)	試驗電壓 Test voltage (VAC)	絕緣電阻 Insulation resistance	損耗角正切 Dissipation Factor
CBB60	-40~+70°C	250~630	2.5~80	T-T:1.75Un/10S	T-T: \geq 3000S	MPP: $\text{tg } \delta \leq$ 0.002(100Hz)
				T-C:2000VAC/60S	T-C: \geq 1000M Ω	MPET: $\text{tg } \delta \leq$ 0.005(100Hz)


執行標準 Executing Standards : GB3667-91

電容量精度： $\pm 5\%$ 或按用戶要求生產

Capacitance Tolerance : $\pm 5\%$, $\pm 10\%$ or according with the request of customers.

外形尺寸 Outline Size :

NO.	D (mm)	H (mm)
1	25	57
2	30	40~78
3	34	60~92
4	35	50~75
5	38	72~90
6	40	70~110
7	42	45~115
8	45	55~120
9	50	62~110
10	54	68
11	60	60~170

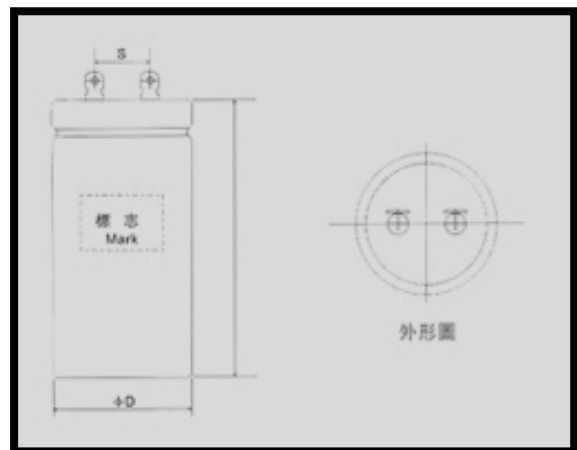

注：特殊規格可協商生產。

Note : Exceptional specifications can be produced on consultation .

Da Hua (Hong Kong) Development Co.

Address: G/F 397 Shanghai Street, Mongkok, Hong Kong

Tel:852 26269193 Fax:852 26269229

Email:sales@dahuahk.com Website:www.dahuahk.com