



CBB90 Induction Cooker Capacitor (MKPH, MKP)


CBB90 Induction Cooker Capacitor (MKPH, MKP)

技術參數 Technical Specification :

型號 Type	執行標準 Standards	環境溫度 Climatic Category	額定電壓 Rated voltage (VAC)	容量範圍 Rated capacitance (μ F)	試驗電壓 Test voltage (VAC)	絕緣電阻 Insulation Resistance	損耗角正切 Dissipation Factor
MKPH	Q/SHD0.463.006 -2002	-25/85/21 -25/105/21	800 (1200VDC) 1000 (1600VDC)	0.12~0.33	2.5Un/10S	$\geq 15000M\Omega$	≤ 0.0005 (10KHz)
MKP	GB/T14472 (IEC60384-14)	-40/85/21	275 (400VDC)	1~5	2.5Un/10S	$\geq 5000S$	≤ 0.001 (1KHz)

電容量精度： $\pm 5\%$ 或按用戶要求生產

Capacitance Tolerance： $\pm 5\%$ or according to customer's request

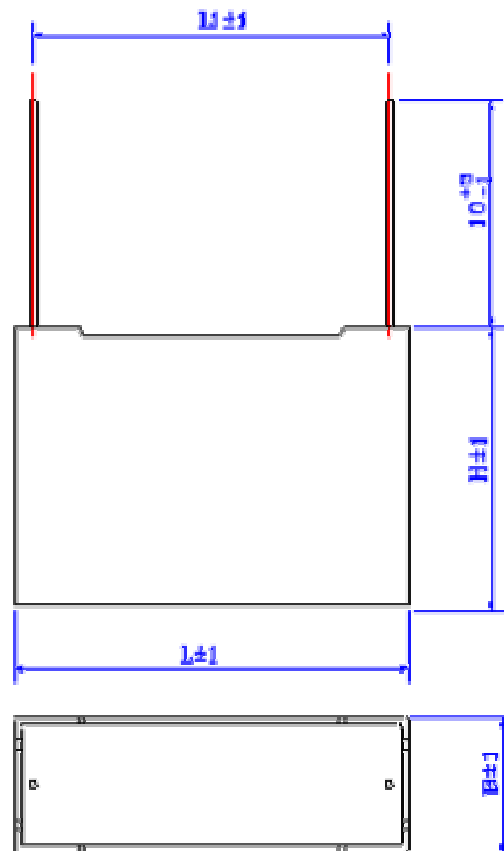

Da Hua (Hong Kong) Development Co.
Address: G/F 397 Shanghai Street, Mongkok, Hong Kong
Tel:852 26269193 Fax:852 26269229
Email:sales@dahuahk.com Website:www.dahuahk.com

外形尺寸 Outline Size :

MKPH 型高頻感應加熱電容器 MKPH High-frequency induction heating Capacitor

NO、	額定電壓 Rated voltage (VAC)	額定容量 Rated capacitance (μ F)	外形尺寸 Dimension (mm)				備註 Note
			L	B	H	L1	
1	800 (1200VDC)	0.20	36	11	22	30.5±1	電容量, 外形尺寸可 按客戶要求進行生 產。 The dimension can produce according to customers' request.
2		0.24		13	24		
3		0.27	37		14		
4		0.30					
5		0.33					
6	1000 (1600VDC)	0.12	36	13	24	30.5±1	
7		0.15					
8		0.20	37	13.5	25	31±1	
9		0.24					
10		0.25	38	15	25		
11		0.27				17	

MKP 型抗電磁波干擾濾波電容器 MKP Resisting electromagnetic wave interference filtering capacitor

NO、	額定電壓 Rated voltage (VAC)	額定容量 Rated capacitance (μ F)	外形尺寸 Dimension (mm)				備註 Note
			L	B	H	L1	
1	275 (400VDC)	1.0	32	9	17	26.5±1	電容量, 外形尺寸可 按客戶要求進行生 產。 The dimension can produce according to customers' request.
2		2.0	30.5	12	20		
3		3.3	32	14	25		
4		4.0	37	14	25	31±1	
5		4.7					
6		5.0	38	17	25		
7		5.0				36	

注：特殊規格可協商生產。

Note : Exceptional specifications can be produced on consultation .

Da Hua (Hong Kong) Development Co.
Address: G/F 397 Shanghai Street, Mongkok, Hong Kong
Tel:852 26269193 Fax:852 26269229
Email:sales@dahuahk.com Website:www.dahuahk.com